

MYT5050.1.2.4

TORKLU MENTEŞE (50*50mm - Krom Kaplama)
TORQUE HINGE (50*50mm-Chrome Plated)



300Kg.

Kapı Uzunluğu (L) / Door length (L) = m

Kapı Kütlesi (m) / Door mass (m) = kg




Yer Çekimi (g) / Gravity (g) = 9,81 m/s²

Menteşe Torku (M) / Torque hinge (M) = 6,5 Nm

Toplam Tork (M ges.) / Total torque (M ges.) = M ges.

Toplam Tork / Total Torque $M ges. = L / 2 \times m \times g$

Menteşe Sayısı (n) / Number of hinges (n) $n = \left(\frac{M ges.}{M} \right)$

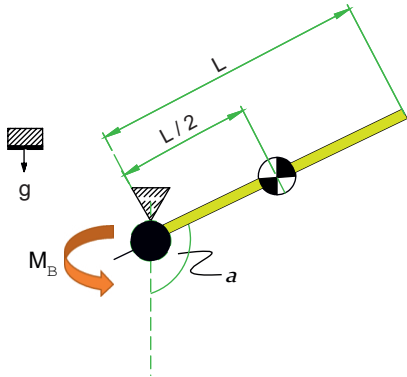

MYT5050.1.5.4

TORKLU MENTEŞE (50*50mm - Boyalı)
TORQUE HINGE (50*50mm-Black Coated)



300Kg.

Kullanım Alanları

- * Jeneratör Kabinleri
- * Kompresör Kabinleri
- * Elektrik Panoları
- * Makine Kapakları

Malzeme

- * Gövde: Zamak
DIN-EN 1774-ZnAl4Cu1
- * Pim :Çelik

Applications

- * Generator Cabinets
- * Compressor Cabinets
- * Enclosures
- * Machinery Covers

Material

- * Body: Zinc
DIN-EN 1774-ZnAl4Cu1
- * Pin : Steel